

# Spreadmatic bread buttering and sandwich preparation

Reduced production time

Accurate portion control

Suitable for sliced breads and soft rolls

Cost-effective for low and high volume manufacturers

Simple to operate and maintain

Full CE conformity




# SPREAD·MATIC

BY DEIGHTON MANUFACTURING U.K. LTD

The Spreadmatic range, by Deighton Manufacturing U.K. Limited, provides automated spreading of product onto bread, designed to increase both efficiency and profits.

With three varied models in the range, the Retail Spreadmatic makes it effective for producers of 500+ sandwiches per day to benefit from automated production, whilst the Commercial and Industrial models and sandwich preparation conveyors cater for higher capacity production requirements.

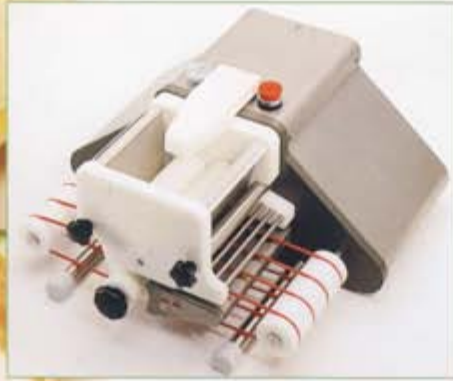

### Retail Spreadmatic

With an output of up to 1000 slices per hour, the Retail Spreadmatic has been designed with the smaller user in mind. The compact size of the equipment ensures that the Retail Spreadmatic fits easily onto kitchen work surfaces. The ease of operation and maintenance makes the Retail Spreadmatic a cost-effective tool for the low volume sandwich manufacturer.

Suitable for sliced breads only.



### Commercial Spreadmatic

The Commercial model accommodates the needs of the expanding and varied sandwich manufacturer. The machine's ability to spread a wide selection of sliced breads and soft rolls, allows the sandwich manufacturer to utilise the equipment across a varied product range.

With an output capacity of up to 3000 slices per hour the single lane Commercial model is ideal for stand alone operation, but is equally successful linked to our custom-made conveyors to form a sandwich production line.




### Industrial Spreadmatic

The Industrial Spreadmatic is the largest model in the range. The double width model has an output capacity of up to 6000 slices per hour, and is ideally suited to larger production requirements. Maintaining the simplicity of operation featured throughout the range, the Industrial Spreadmatic ensures that valuable production time is not wasted in machinery maintenance.

The model is easily linked to sandwich conveyor lines, affording the larger producer the cost saving benefits of streamlining production.

Suitable for sliced breads and soft rolls.

# Simple and Smooth Operation

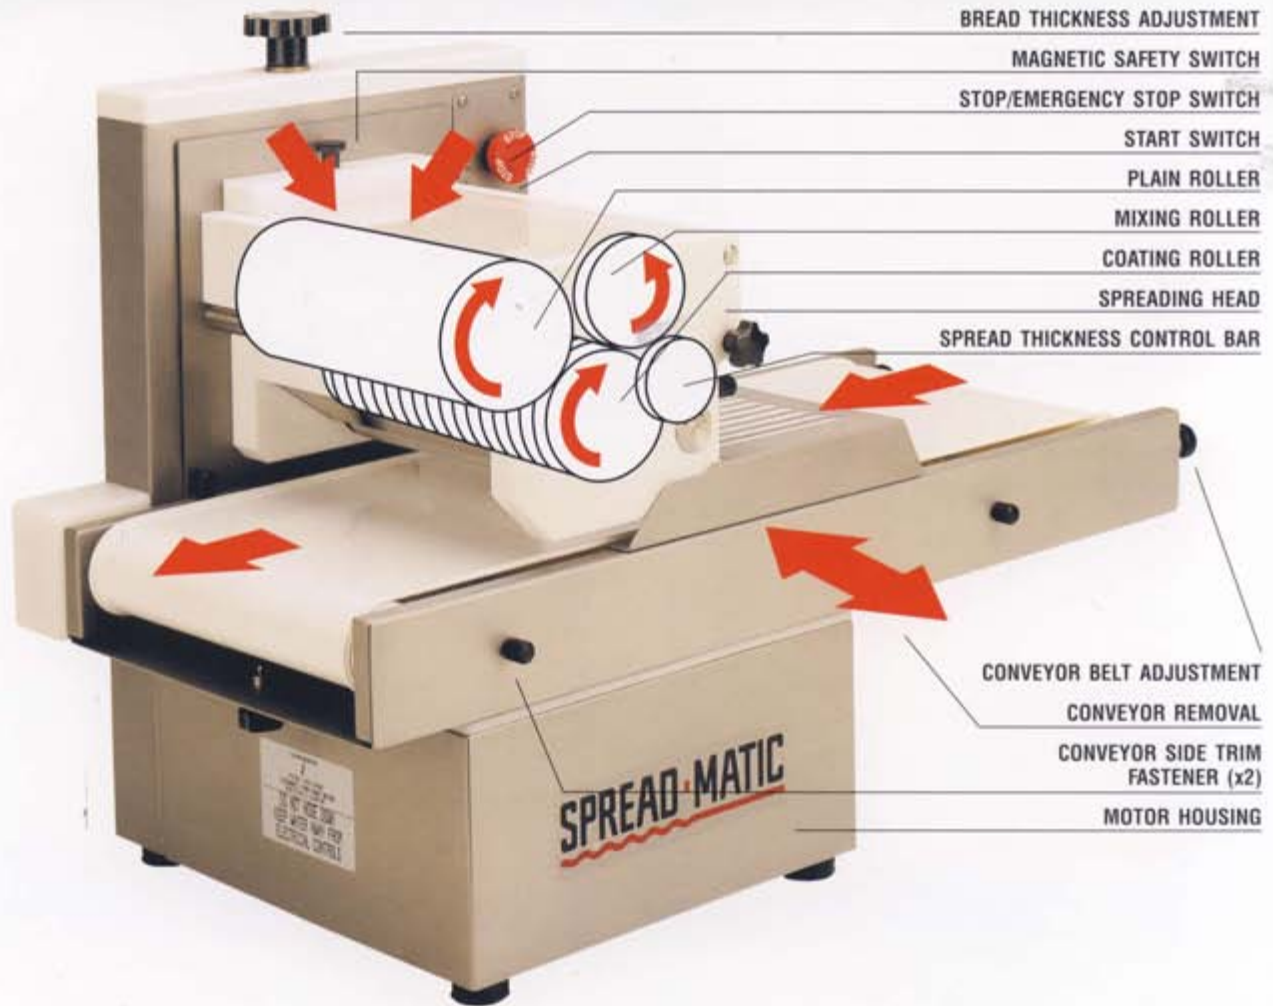

2



*Height thickness adjustment*



*Accurate portion control*

Simplicity of operation keeps machine maintenance and staff training to a minimum. Product is placed into the butter box, where it is applied to the coating roller. As bread is placed onto the conveyor, and passes underneath the coating roller an even spread is applied from corner to corner of the slice, before presenting the coated slice at the opposite end of the conveyor.


## *Versatile Adjustments*

The Spreadmatics are easily adjusted to accommodate varying bread heights. The Retail model, suited only to sliced breads, can be adjusted to accommodate heights of up to 15mm, whereas the Commercial and Industrial models have been developed for both sliced breads and soft rolls to offer increased flexibility. These models can be adjusted to accommodate heights of up to 30mm.


The spread thickness adjustment offers equal flexibility, allowing the operator to set the weight from 2 grams to 5 grams on the Retail model, or up to 8 grams on the Commercial and Industrial models.

# Technical Specification

The Spreadmatic range has been constructed from fully approved materials on all food contact surfaces. The spreading head and conveyor are fully detachable to ensure that the machine is easy to clean. All Spreadmatic models are fully safety locked and have full CE conformity.

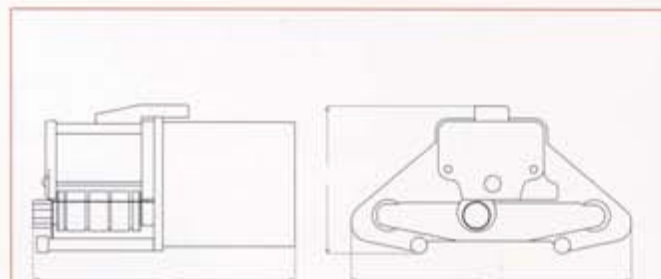

ref: Retail Spreadmatic model

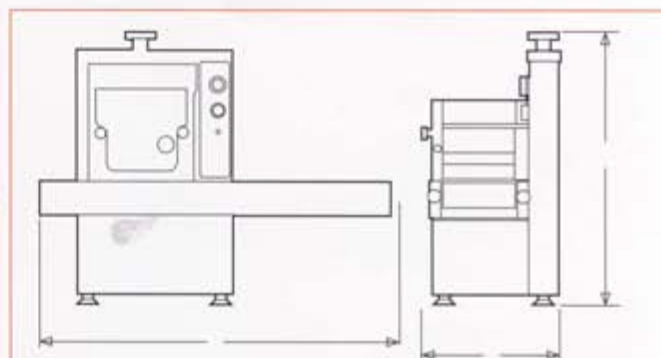

ref: Commercial and Industrial Spreadmatic models

2

## Retail Spreadmatic

Length (A)	450mm	Width (B)	420mm	Height (C)	230mm	Weight	25Kg	Output	1,000 slices per hour
Electricity Supply*	220v/240v 50/60Hz	Power	40 watts	Bread Width	135mm	Bread Thickness	5-15mm	Spread weight/slice	up to 5 grams

## Commercial Spreadmatic

Length (A)	780mm	Width (B)	310mm	Height (C)	585mm	Weight	35Kg	Output	3,000 slices per hour
Electricity Supply*	220v/240v 50/60Hz	Power	40 watts	Bread Width	135mm	Bread Thickness	5-30mm	Spread weight/slice	up to 8 grams

## Industrial Spreadmatic

Length (A)	780mm	Width (B)	435mm	Height (C)	585mm	Weight	40Kg	Output	6,000 slices per hour
Electricity Supply*	220v/240v 50/60Hz	Power	40 watts	Bread Width	260mm	Bread Thickness	5-30mm	Spread weight/slice	up to 8 grams

\* 110v model also available

# DEIGHTON

MANUFACTURING U.K. LIMITED

**ERIKARECORD LLC**

37 ATLANTIC WAY • CLIFTON, NJ 07012-1142

Tel: (973) 614-8500 • Fax: (973) 614-8503 • [www.erikarecord.com](http://www.erikarecord.com)



AVAILABLE FROM: