

## Deighton | Traymatic

### An Industry Leading Cookie Forming and Panning Machine!

The Traymatic combines the depositing ability of our popular Formatic cookie machine with automatic panning/traying. Capable of processing doughs with large inclusions, their unique drum system also facilitates in producing cookies with a variety of different shapes, as well as varying thicknesses.



### Features

- ✓ **Versatility**  
*This cookie machine is also has the potential to form granola bars, protein bars, scones, biscuits, dog treats, and other baking/confectionery products.*
- ✓ **Accurate Portion Control**  
*Consistent results (weight and size) with each deposit. Weight can also be modified via thickness adjustments.*
- ✓ **Automatic Wire Cleaning**  
*Attachment designed to automatically scrape the wire-release mechanism after each deposit.*
- ✓ **Adjustable Thickness**  
*Deposit thickness ranging from as thin as your product will allow – 0.75 inches (19 mm).*
- ✓ **Programmable Panning System**  
*An innovative panning system designed to automatically deposit onto the baking tray for streamlined production.*
- ✓ **Interchangeable Drums**  
*Create a wide variety of cookies types and shapes with an assortment of drum options.*

### Available Options

- + **Additional Drums**  
*Purchase additional drums that can be interchanged for a diverse product lineup. This includes custom shaped drums.*
- + **Various Hopper Sizes**  
*Larger hoppers are available for large-scale production.*
- + **Deep Drop Drum**  
*Achieve deposits with thickness ranging between 0.25 inches (7 mm) – 1.25 inches (32 mm).*



## Deighton | Traymatic

### Custom Drum Shapes

We are capable of producing custom drums with a wide variety of different shapes. All shapes must be able to fit within a 4.25 x 4.25 inches (108 x 108 mm) area. This includes the ability to fit multiple shapes on a single drum.




### Technical Specifications

| Traymatic  |   |
|--|---|
| <b>Electrical</b>                                | 220v   1ph   60hz                           |
| <b>Hopper Capacity</b>                           | 45 lb.   20.5 kg                            |
| <b>Output</b> <i>(Revolutions/Hour)</i>          | 3,000                                       |
| <b>Production Rate</b> <i>(includes traying)</i> | 3,000 - 6,000/hour                          |
| <b>Motor</b> <i>(Power)</i>                      | 1.9 KW                                      |
| <b>Standard Dimensions</b> <i>(A x B x C)</i>    | 77 x 43 x 73"<br>1,950 x 1,090 x 1,855 mm   |
| <b>Net Weight</b>                                | 1,070 lb   485 kg                           |
| <b>Shipping Dimensions</b> <i>(L x W x H)</i>    | 83 x 48.5 x 75"<br>2,110 x 1,230 x 1,900 mm |
| <b>Shipping Weight</b>                           | 1,323 lb   600 kg                           |

# Deighton | Traymatic

## Technical Drawings

Traymatic

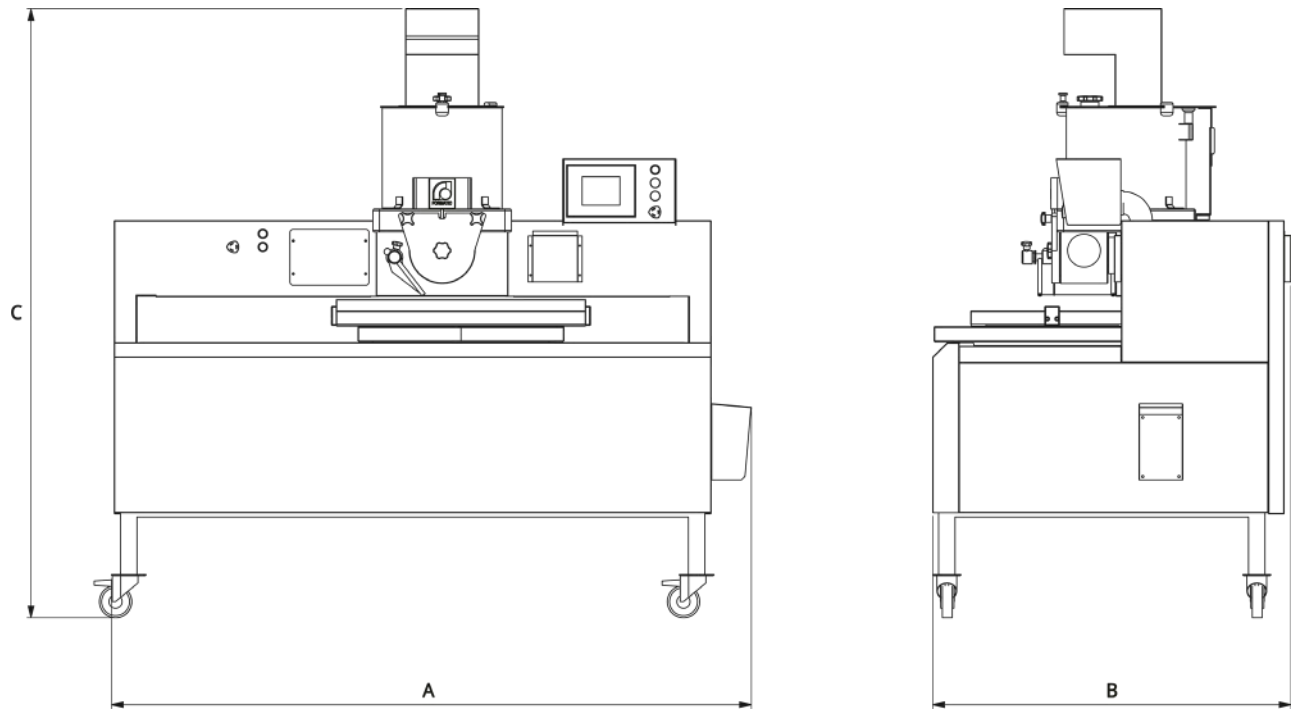

### Notes:

---

---

---

---

---

*Specifications are subject to change without notice, as we remain committed to delivering the best equipment possible. Technical specifications and warranty information will be provided in your quote.*